


THE NEVERLEAK COMPANY, LP

SPECIFICATION SUBMITTAL SHEET

NEVA-CALK™ COPPER BASE ROOF FLASHINGS

SPECIFICATION:

Deep drawn 99.99% pure copper base 16 ounce, which offers excellent corrosion resistance. A premium elastomeric collar is mechanically locked to the base to form a one-piece assembly. All made from prime/virgin materials.

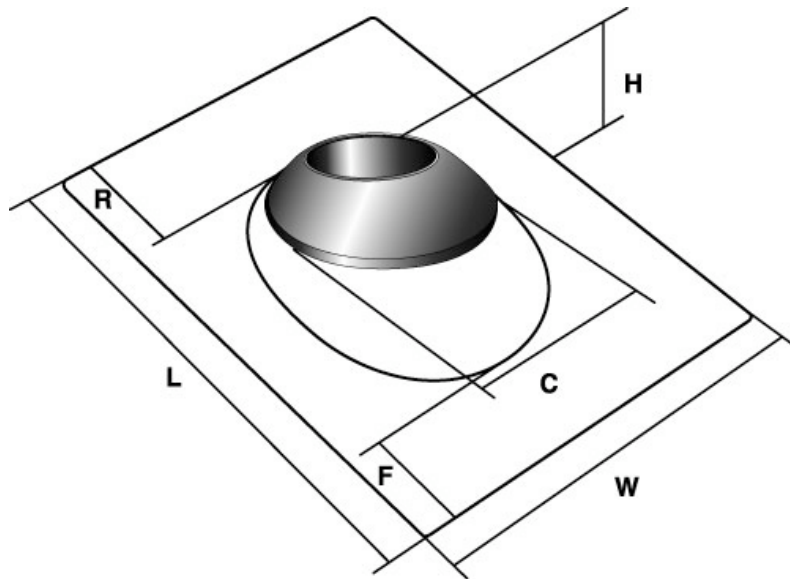

Roof Flashing Dimensional Characteristics							
Stock#	Pipe Size	Dim. W	Dim. L	Dim R	Dim. F	Dim. C	Dim. H
CNC30	3"	10.75"	14.5"	4.5"	2.5"	5.5"	2.625"
CNC40	4"	11.75"	15.5"	4.5"	2.5"	6.5"	2.375"
CN123	1.25"-2"-3"	10.75"	14.5"	4.25"	2.5"	5.25"	2.75"
CN340	3" - 4"	11.75"	15.5"	4.5"	2.5"	6.5"	3"

ASTM INFORMATION:

Copper:

ASTM B-370 FED QQ-C-576 AMS 4500 UNS-C11000 Dead Soft Copper

Premium Elastomeric Collar:

Typical Values: Durometer hardness Shore A 67, ASTM D2240. Elongation at break 450%, ASTM D412.

Do not use petroleum-based mastics, sealing compounds or paints on collar!