


THE NEVERLEAK COMPANY, LP

SPECIFICATION SUBMITTAL SHEET

SUPER NEO-POLY™ ROOF FLASHINGS

SPECIFICATION:

Injection molded polypropylene no break hard base with premium elastomeric collar. Fits from flat to 15:12 pitch (51°). All made from prime/virgin materials.

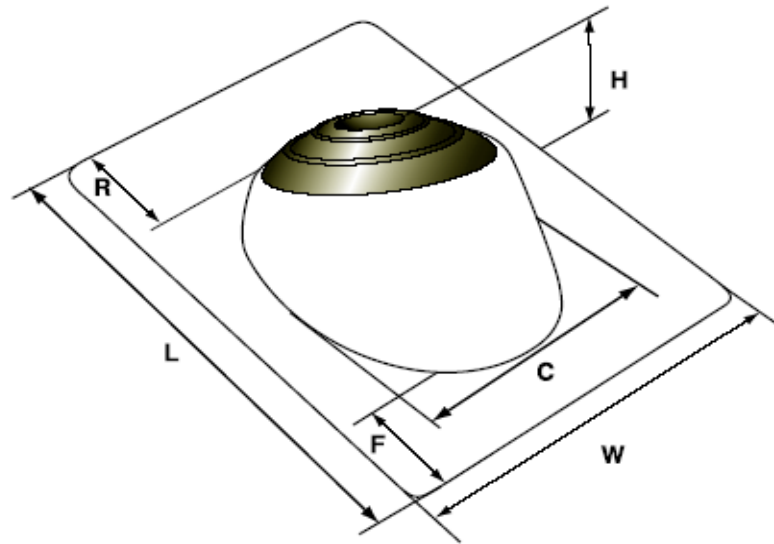

Roof Flashing Dimensional Characteristics							
Stock#	Vent Size	Dim. W	Dim. L	Dim R	Dim. F	Dim. C	Dim. H
SNPF15	1.25-1.5"	8.875"	11.75"	3.625"	2.375"	5.25"	2.5"
SNPF20	2"	8.875"	11.75"	3.625"	2.375"	5.25"	2.5"
SNPF30	3"	10.75"	13.625"	3.5"	2.5"	6.75"	3.5"
SNPF40	4"	12.4375"	15.3125"	3.375"	2.3125"	7.75"	4"
SNP123	1.5"-2"-3"	10.75"	13.625"	3.5"	2.5"	6.75"	3.5"
SNP340	3"-4"	12.4375"	15.3125"	3.375"	2.3125"	7.75"	4"

ASTM INFORMATION:

Polypropylene Base

Tensile Strength@ yield,psi ASTM D638, 24hr water absorption ASTM D570

Premium Elastomeric Collar

Typical Values: Durometer Hardness Shore A67, ASTM D2240. Elongation at break 450%, ASTM D412.

Do not use petroleum based mastics, sealing compounds or paints on collar or base!